


2.4GHZ WLAN TRANSMIT/RECEIVE RFeIC

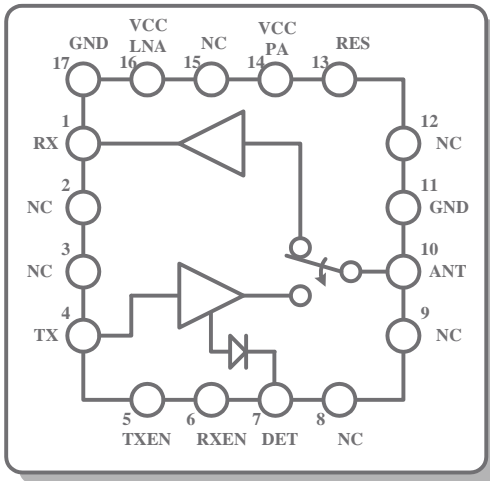

Description

The RFX2402 is a fully integrated, single-chip, single-die RFeIC (RF Front-end Integrated Circuit) which incorporates all the RF functionality needed for today's wireless communications. The RFX2402 architecture integrates the PA, LNA, Transmit and Receive switching circuitry, the associated matching network, and a harmonic filter all in a BiCMOS single-chip device. This RFeIC is designed for use in 802.11b/g/n applications operating at 2.4GHz.

Combining superior performance, high sensitivity and efficiency, low noise, small form factor, and low cost, the RFX2402 is the ideal solution for single antenna applications, and the ideal building block for MIMO applications. RFX2402 has simple and low-voltage CMOS control logic, and requires minimal external components for system implementation. The PA power detector circuit is also integrated.

Applications

- ▶ 802.11b/g/n Access Point
- ▶ 802.11b/g/n Mobile Platforms
- ▶ 802.11b/g/n NIC PC Card
- ▶ Other 2.4GHz Transceivers
- ▶ 802.11b/g/n Multimedia Applications

Parameters	Value	Conditions
TX		
Gain	30dB	In-band, Typical, TX Enabled
Quiescent Current	70mA	Typical, TX Enabled, No RF Applied
Linear Output Power 1	+18dBm	802.11g/n 54Mbps OFDM EVM < 3.5%, At Antenna
Linear Output Power 2	+21dBm	802.11b 1Mbps CCK Mask Compliance, At Antenna
Linear Output 1 Current	130mA	Typical, +18dBm at ANT
2 nd /3 rd Harmonic	-30dBc	+20dBm at ANT
RX		
Gain	15dB	In-band, Typical, RX Enabled
Noise Figure	2.7dB	In-band, Typical, RX Enabled
Input P1dB	-3dBm	In-band
Quiescent Current	8mA	RX Enabled
CHIP		
Operating Frequency	2.4-2.5GHz	TX or RX Enabled
Supply VCC	2.7-3.6V	
Shut-down Current	0.05uA	
Input Output Return Loss	-10dB	RF Ports, Typical, In Band
RF Port Impedance	50-Ohm	Single-ended
Control Signals	High Enable	CMOS Logic, <0.3V Low >1.2V High
Package	16-QFN	3.0mm x 3.0mm x 0.5mm

RFeIC® is a registered trademark of RFaxis, Inc. All rights reserved.

This product brief is a general list of parameters to provide information on the capabilities of this device and is subject to change without notice.